

**HIKVISION®**



# Hikvision Digital Signage

Catalog 2022 H2

# Hikvision Digital Signage

## Three Solutions



Network



### Advertising

Design and display creative advertisements





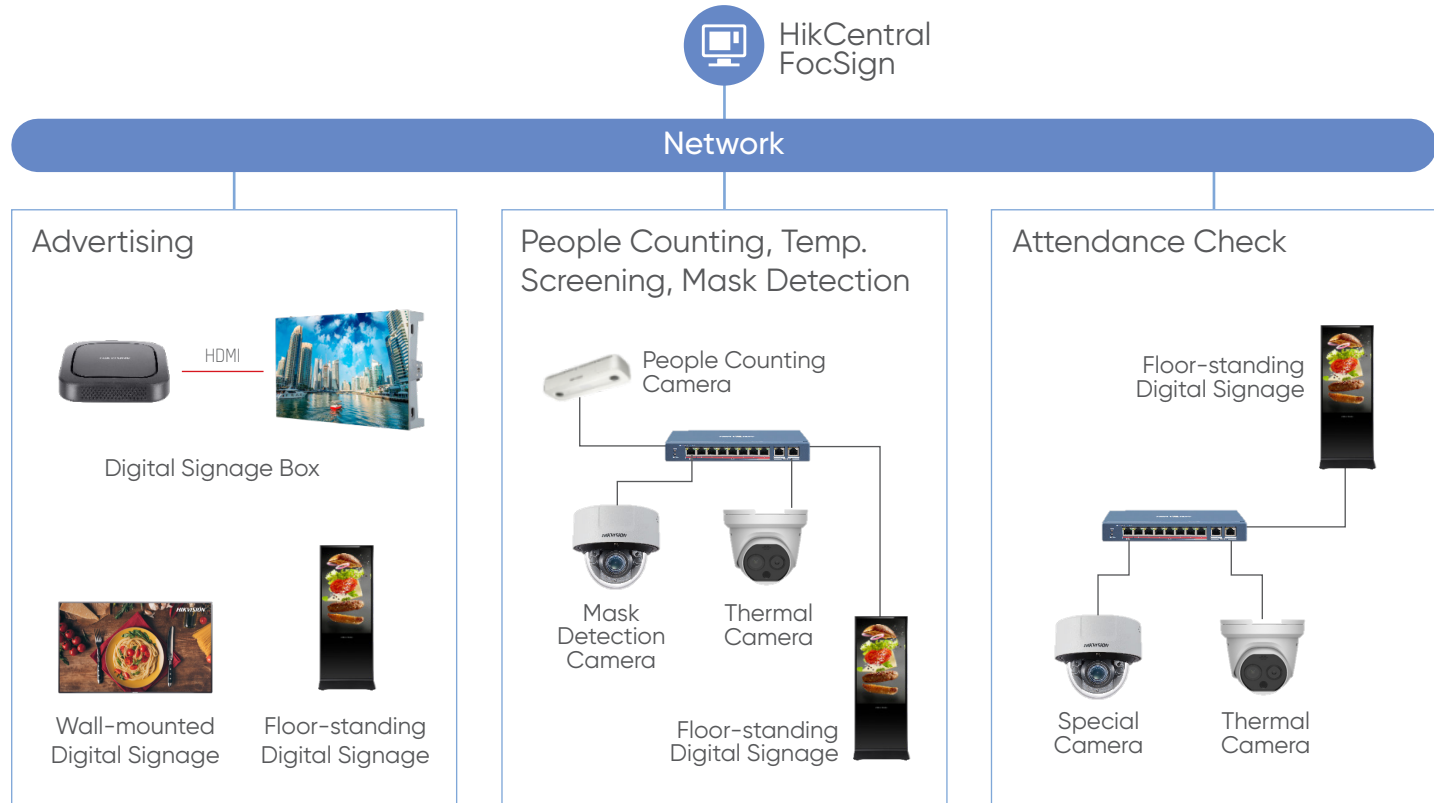
### People Counting, Temp. Screening, & Mask Detection

Count customer flow, screen skin temperatures and mask status to protect public health



### Attendance Checking

Check attendance and detect skin temperature at the same time



# HikCentral FocSign Highlights

The HikCentral FocSign platform remotely manages digital signage devices (up to 1,024), edits programs, configures schedules, and releases content to the terminals.

B/S structure

Free for 30 channels

Supports 29 languages

Supports ISUP

## Key Functions & Features

### Diversified Content Creation

- Multiple Media Types: Supports 13 media types, including video, picture, audio, webpages, etc., helping to build more attractive programs
- Various Programs: Supports advertising, temperature screening, flow control, employee attendance, and more

### Remote Management to Save Costs





- Centralized Management: Supports centralized program release, cut-in messages, and remote viewing to check run status
- Remote Device Control: Supports remote control of terminals to power on or off, adjust volume and brightness, play or pause, and configure parameters, reducing on-site visits and costs




### Ready-to-Go Visualized Design Templates



- 8 Types of Program Templates: Saving time and design costs
- Visualized Designing Process: Anyone can easily create a program without professional training






# Digital Signage Terminal

Model		DS-D6022FN-B	DS-D6032FN-B	DS-D6043UN-B	DS-D6055UN-B
Image					
Display	Screen Size	21.5 inch	32 inch	43 inch	55 inch
	Active Zone (H x V)	478.656 x 260.28 mm	698.4 x 392.85 mm	941.184 x 529.416 mm	1209.6 x 680.4 mm
	Backlight	ELED		DLED	
	Pixel Pitch	0.24795 x 0.24795 mm	0.36375 x 0.36375 mm	0.2451 x 0.2451 mm	0.315 x 0.315 mm
	Resolution	1920 x 1080 @60 Hz		3,840 x 2,160 @60 Hz	
	Brightness	250 nits	350 nits	500 nits	
	Visual Angle	Horizontal 178°, vertical 178°			
	Color Depth	8 Bits		10 Bits	
	Contrast	3000:1	4000:1		
	Response Time	6.5 ms		8 ms	
	Refresh Rate	60 Hz			
	Color Gamut	72% NTSC			
	Haze	25%	2%		
Built-in System	CPU	Cortex-A17, 4-core, 1.6 GHZ			
	Memory	2 GB			
	Operation System	Android 8.1			
	SD Card	16 GB			
Interface	Video & Audio Inputs	AUDIO IN x 1	AUDIO IN x 1, HDMI x 2, VGA x 1		
	Video & Audio Outputs	AUDIO OUT x 1			
	Network Interface	LAN x 1, Wi-Fi x 1			
	Data Transmission Interface	USB 2.0 x 2, TF Card x 1, BT4.0 x 2	USB 2.0 x 2, TF Card x 1, BT 4.0 x 1		
General	Power	100 to 240 VAC, 50/60 Hz			
	Power Consumption	≤ 40 W	≤ 75 W	≤ 110 W	≤ 200 W
	Standby Consumption	≤ 10 W	≤ 0.5 W		
	Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)			
	Operating Humidity	20% to 90% RH	10% to 80% RH		
	Product Dimensions (W x H x D)	492.36 x 289.68 x 41.88 mm	723.24 x 423.25 x 61.5 mm	967.18 x 555.42 x 72.44 mm	1237.2 x 708 x 83.44 mm
	Package Dimensions	593 x 434 x 157 mm	898 x 152 x 544 mm	1172 x 703 x 192 mm	1403 x 856 x 217 mm
Weight	3.03 Kg	5.90 kg	11.39 kg	19.2 kg	

Model		DS-D6065UN	DS-D6075UN	DS-D6086UN
Image				
Display	Screen Size	65"	75"	86"
	Active Zone (H × V)	1428.48 × 803.52 mm	1649.664 × 927.936 mm	1895.04 × 1065.96 mm
	Backlight	DLED		
	Pixel Pitch	0.372 × 0.372 mm	0.4296 × 0.4296 mm	0.4935 × 0.4935 mm
	Resolution	3,840 × 2,160 @60 Hz		
	Brightness	500 nits		
	Visual Angle	Horizontal 178°, vertical 178°		
	Color Depth	1.07G(8 Bits+FRC)		
	Contrast	1200:1		
	Response Time	8 ms	8 ms	13 ms
	Refresh Rate	60 Hz		
	Color Gamut	72% NTSC		
	Haze	1%		
Built-in System	CPU	A73*2+A53*2, 1.7GHz		
	Memory	3 GB		
	Operation System	Android 8.0		
	SD Card	32 GB		
Interface	Video & Audio Inputs	DVI-I × 1, HDMI2.0 × 2, DP1.2 × 1, AUDIO LINE IN × 1		
	Video & Audio Outputs	DP1.2 × 1, AUDIO LINE OUT × 1		
	Network Interface	LAN × 1, Wi-Fi × 1		
	Data Transmission Interface	USB 2.0 × 2, TF Card × 1		
General	Power	100 to 240 VAC, 50 or 60 Hz		
	Power Consumption	≤330W	≤380W	≤570W
	Standby Consumption	≤ 0.5 W		
	Operating Temperature	0 to 40 °C (32 to 104 °F)		-20 °C to 60 °C (-4 °F to 104 °F)
	Operating Humidity	20% to 80%		
	Product Dimensions (W × H × D)	1462.3 × 837.3 × 93.4 mm	1683.5 × 961.7 × 95.3 mm	1929 × 1100 × 95.3 mm
	Package Dimensions	1,172 × 725 × 212 mm	1848 × 1158 × 203 mm	2130 × 1321 × 248 mm
Weight	27.8 kg	37.5 kg	49.5 kg	

Model		DS-D6043UH	DS-D6055UH
Image			
Display	Screen Size	43"	55"
	Active Zone (H × V)	941.184 × 529.416 mm	1209.6 × 680.4 mm
	Backlight	DLED	
	Pixel Pitch	0.2451 × 0.2451 mm	0.315 × 0.315 mm
	Resolution	3,840 × 2,160 @60 Hz	
	Brightness	700 nits	
	Visual Angle	Horizontal 178°, vertical 178°	
	Color Depth	1.07G(8 Bits+FRC)	
	Contrast	1200:1	5000:1
	Response Time	8 ms	8 ms
	Refresh Rate	60 Hz	
	Color Gamut	72% NTSC	
	Haze	25%	
Built-in System	CPU	A73*2+A53*2, 1.76Hz	
	Memory	3 GB	
	Operation System	Android 8.0	
	SD Card	32 GB	
Interface	Video & Audio Inputs	DVI-I × 1, HDMI2.0 × 2, DP1.2 × 1, AUDIO LINE IN × 1	
	Video & Audio Outputs	DP1.2 × 1, AUDIO LINE OUT × 1	
	Network Interface	LAN × 1, Wi-Fi × 1	
	Data Transmission Interface	USB 2.0 × 2, TF Card × 1	
General	Power	100 to 240 VAC, 50 or 60 Hz	
	Power Consumption	≤225W	≤315W
	Standby Consumption	≤ 0.5 W	
	Operating Temperature	0 to 40 °C (32 to 104 °F)	
	Operating Humidity	20% to 80%	
	Product Dimensions	973.0 × 561.2 × 63.5 mm	1241.8 × 712.6 × 63.5 mm
	Packing Dimensions	1070 × 673 × 141 mm	1350 × 860 × 160 mm
Weight	10.7 kg	16.6 kg	

Model		DS-D6043UL-B/S	DS-D6055UL-B/S	DS-D60C-B
Image				
Display	Screen Size	42.5"	54.6"	-
	Active Zone (H x V)	941.184 mm x 529.416 mm	1209.6 mm x 680.4 mm	-
	Backlight	DLED		-
	Pixel Pitch	0.2451 mm x 0.2451 mm	0.315 mm x 0.315 mm	-
	Resolution	3,840 x 2,160 @60 Hz		1920 x 1080p @ 30Hz, 1920 x 1080p @ 50Hz, 1920 x 1080p @ 60Hz, 1280 x 720p @ 30Hz, 1280 x 720p @ 50Hz, 1280 x 720p @ 60Hz, 3840 x 2160p @ 30Hz, 3840 x 2160p @ 50Hz, 3840 x 2160p @ 50Hz (YCbCr420), 3840 x 2160p @ 60Hz, 3840 x 2160p @ 50Hz (YCbCr420)
	Brightness	500 nits		-
	Visual Angle	Horizontal 178°, vertical 178°		-
	Color Depth	1.07G(8 Bits+FRC)		-
	Contrast	5,000 : 1	5,700 : 1	-
	Response Time	6.5 ms		-
	Refresh Rate	60 Hz		-
	Color Gamut	72% NTSC		-
Haze	2%		-	
Built-in System	CPU	Cortex-A17, 4-core, 1.6 GHz		Cortex-A17, 4-core
	Memory	2 GB		2 GB
	Operation System	Android 8.1.0		Android 6.0.1
	SD Card	16 GB		8 GB
Interface	Video & Audio Inputs	AUDIO IN x 1 HDMI IN x 2 VGA IN x 1		AUDIO IN x 1
	Video & Audio Outputs	AUDIO OUT x 1		AUDIO OUT x 1 HDMI x 1
	Network Interface	LAN x 1, Wi-Fi x 1		LAN x 1, Wi-Fi x 1
	Data Transmission Interface	USB x 2, BT 4.2 x 1	USB x 2, TF Card x 1, BT 4.2 x 1	USB x 2, BT 4.0 x 1
General	Power	100 to 240 VAC, 50 or 60 Hz		12 VAC, 2 A
	Power Consumption	≤150W		≤ 20 W
	Standby Consumption	≤ 0.5 W		≤ 1 W
	Operating Temperature	0 to 40 °C (32 to 104 °F)		0 °C to 50 °C (32 °F to 122 °F)
	Operating Humidity	10% to 80%	0% to 90%	10 % to 90 %
	Product Dimensions	585.14 x 1767.29 x 450 mm	1962.7 x 738 x 450 mm	145 x 145 x 31.89 mm
	Packing Dimensions	1935 mm x 765 mm x 303 mm	2100 x 916 x 303 mm	188 x 176 x 101 mm
Weight	48.46 kg	66.19 kg	0.6 kg	

# Hikvision Digital Signage Catalog 2022 H2

## Hikvision Europe

Dirk Storklaan 3  
2132 PX Hoofddorp  
The Netherlands  
T +31 23 5542770  
info.eu@hikvision.com

## Hikvision France

6 rue Paul Cézanne,  
93360 Neuilly-Plaisance  
France  
T +33 (0)1 85330450  
info.fr@hikvision.com

## Hikvision Poland

Business Garden, Budynek B3  
ul. Żwirki i Wigury 16B,  
02-092 Warszawa  
T +48 4600150  
info.pl@hikvision.com

## Hikvision Czech

BETA Building, Vyskocilova  
1481/4, Prague 4  
Czech Republic  
T +42 29 6182640  
info.cz@hikvision.com

## Hikvision Germany

Werner-Heisenberg Str. 2b  
63263 Neu-Isenburg,  
Germany  
T +49 69 401507290  
sales.dach@hikvision.com

## Hikvision Romania

Splaiul Independentei street  
291-293, Riverside Tower,  
12th floor, 6th district,  
Bucharest, Romania  
T +31235542770/988  
marketing.ro@hikvision.com

## Hikvision Belgium

Neringenweg 44,  
3001 Leuven, Belgium  
T +31 23 5542770  
info.bnl@hikvision.com

## Hikvision Hungary

Budapest, Reichl Kálmán u. 8,  
1031, Hungary  
T +36 1 323 7650  
info.hu@hikvision.com