



KX 10-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE SPEAKER



Description

The KX 10-A is a compact, high-output 2-way active speaker system engineered for professional users, combining precise directivity, high SPL capability, and advanced system integration. The low-frequency section features a 10" neodymium driver in a bass-reflex design; the high-frequency section comprises a neodymium compression driver with a 1.75" PKX dome, coupled to a 90° x 70° True Resistive Waveguide, rotatable by 90° to ensure flexible coverage options. An integrated two-channel 2000 W Class D amplifier with proprietary DSP processing and remote management via RDNet enables optimal system performance. Its weatherproof, multifunctional enclosure with Quick Fit and M10 inserts supports versatile deployment for ground-stacked, pole-mounted, or flown applications.

Features

- › 130 dB SPL Max
- › Rotatable 90° x 70° TRW Horn
- › 10" neodymium woofer, 2.5" voice coil
- › 1.75" PKX dome, neodymium compression driver
- › 2 channel, 2000 W Class D Amplifier
- › DSP Processing with FIRPHASE and BMC
- › RDNet Networked Management
- › powerCON TRUE1 TOP mains connectors

Part Number

13000902 KX 10-A

220-240 V

Black


EAN 8024530022815



KX 10-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE SPEAKER

Line Art 2D

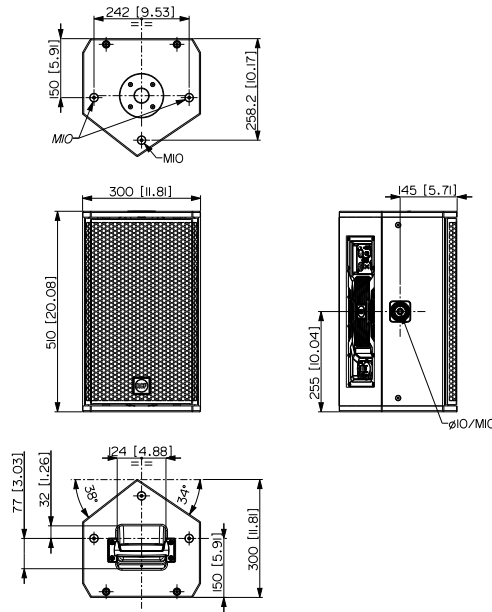

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	60 Hz ÷ 20000 Hz
	Max SPL @ 1m	130 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	50°
Transducers	Compression Driver	1 x 1.0" neo, 1.75" v.c
	Woofer	10" neo, 2.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	1600 Hz
	Protections	Thermal, HF
	Limiter	Fast Limiter
	Controls	Bypass, Linear/High Pass, Volume
	RDNet	Onboard
Power section	Total Power	2000 W Peak
	High frequencies	600 W Peak
	Low frequencies	1400 W Peak
	Cooling	Convection
	Connections	Powercon TRUE1 TOP IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Hardware	3X M10 TOP AND BOTTOM 2X PIN D.10 AND M10 SIDE
	Handles	1 TOP
	Pole mount/Cap	35 mm insert
	Grille	Steel with clothing
	Color	Black



KX 10-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE SPEAKER

Size / Weight	Height	510 mm / 20.08 inches	
	Width	300 mm / 11.81 inches	
	Depth	300 mm / 11.81 inches	
	Weight	14 kg / 30.86 lbs	
Rigging / Mounting	ACCESSORIES		
	FLOOR STANDS		
	13360109 AC PRO-FS	Black	EAN 8024530006471
	FLYING BRACKETS		
	13360031 AC EB 4X		EAN 8024530018870
	HORIZONTAL BRACKETS		
	13360711 HBR60711	Black	EAN 8024530023140
	POLE MOUNT KITS		
	13360232 AC PMX		EAN 8024530010058
	13360110 AC PRO-PM	Black	EAN 8024530006488
	13360067 PM-KIT M20	Black	EAN 8024530014599
	VERTICAL BRACKETS		
	13360712 VBR60712	Black	EAN 8024530023157
	Protections	COVERS	
13360710 CVR60710		Black	EAN 8024530023133
RAIN PROTECTIONS			
13360689 RPR60689	Black	EAN 8024530022914	
Cables	CABLES KIT		
	13360102 AC XLR 3M3F		EAN 8024530006402