



KPS 808

8-CHANNEL AMPLIFIER WITH DSP



Description

KPS 808 is a professional 4-channel amplifier with a total output power of 6400 W, designed for high-demanding audio installations where flexibility, reliability, and advanced control are essential. Equipped with Class-D amplification and integrated DSP, it provides complete and accurate signal processing, with intuitive configuration through RCF's RDSpace software. The library of RCF loudspeakers' presets simplifies the setup and ensures optimal performance. The multi-stage protection system ensures maximum safety against overloads and short circuits, while the universal power supply with PFC guarantees worldwide compatibility and stable operation. Native Ethernet connectivity makes it ideal for distributed systems with independent zone control, while the integrated wireless access point allows direct connection with mobile devices such as smartphones and tablets.

Features

- › 8 x 800 W Class-D power amplifier
- › Integrated signal processing
- › Presets for RCF loudspeakers
- › Low and high impedance outputs configuration
- › Flexible and scalable multi-zone architecture
- › Network management with RDSpace software
- › API drivers for third party control systems
- › PoE wall accessories for remote control

Part Number


12100098	KPS 808 EU	EU	90-240 V	Black	EAN 8024530023829
12100122	KPS 808 US	US	90-240 V	Black	EAN 8024530024413



KPS 808

8-CHANNEL AMPLIFIER WITH DSP

Line Art 2D

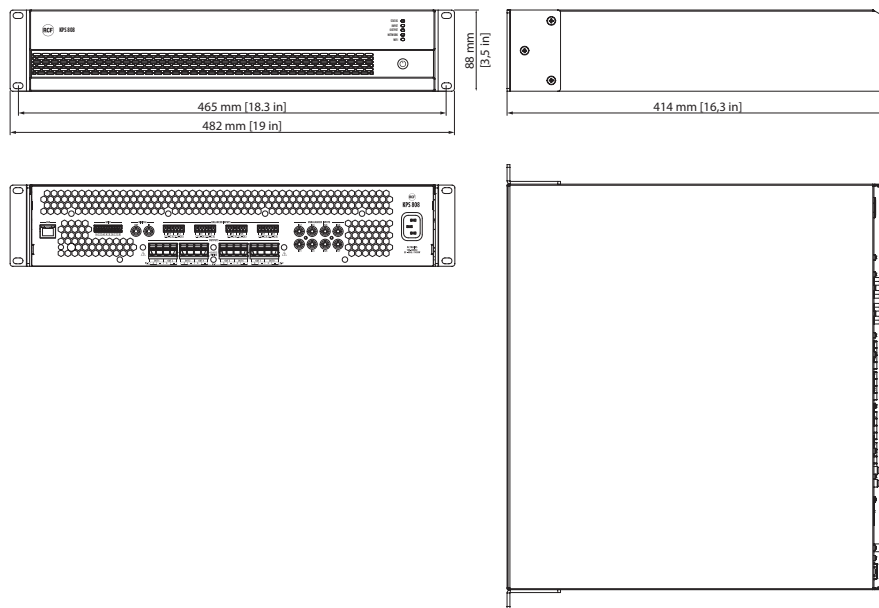

TECHNICAL SPECIFICATIONS

Amplifier specifications

Amplifier Class	D
Output Power	8 x 800 W @ 2 ohm 8 x 800 W @ 4 ohm 8 x 400 W @ 8 ohm 4 x 1600 W @ 4 ohm (bridge) 4 x 1600 W @ 8 ohm (bridge)
Output power @ 100 V	4 x 1600 W @ 100 V
Output power @ 70 V	4 x 1200 W @ 70 V
Frequency Response (-3dB)	20 Hz - 20000 Hz
SNR Analog inputs ("A" weighted)	>108 dB
SNR Digital inputs ("A" weighted)	>108 dB
Distortion (THD+N) (20 Hz - 20000 Hz, 400 W @ 8 ohm)	<0.05 %

Input section

Total number of inputs	9
Mic+Line inputs	8
Mic+Line connectors	Euroblock, RCA
Digital inputs	1
Digital connectors	RCA
Digital type	S/PDIF
General Purpose Inputs (GPI)	5
Programmable GPI	Yes



KPS 808

8-CHANNEL AMPLIFIER WITH DSP

Output section	Signal output number	1
	Signal output connectors	RCA
	Power output connectors	Euroblock
	General Purpose Outputs (GPO)	5
	Programmable GPO	Yes
Processing	DSP	Yes
Configuration and control	Configuration	PC Software
	Network	Ethernet
	RCF speakers presets	Yes
	Priority	Yes
	Protocols for system integration	AMX, Control4, Elan, Q-SYS, RTI, Symetrix, URC
Protections	Cooling	Forced
	Short circuit	Yes
	Thermal	Yes
	DC	Yes
	Fuses	Yes
	VHF (Very High Frequencies)	Yes
Power requirement	Operating voltage	90-240 V~ 50/60Hz
	Power consumption	1400 W
Standard compliance	Safety agency	CE compliant, UL62368-1
Physical specifications	Cabinet/Case Material	Metal
	Color	Black
	Rack mounting	19", 2U
Size / Weight	Height	88 mm / 3.46 inches
	Width	483 mm / 19.02 inches
	Depth	414 mm / 16.3 inches
	Weight	11.6 kg / 25.57 lbs

ACCESSORIES

Electronics

WALL MOUNT REMOTE CONTROLS

12399114	RC KPS EU	Black - RAL 9005	EAN 8024530023881
12399115	RC KPS EU	White - RAL 9003	EAN 8024530023898
12399116	RC KPS US	Black - RAL 9005	EAN 8024530023904
12399117	RC KPS US	White - RAL 9003	EAN 8024530023911

Rack Components

RACK MOUNT KITS

17360039	AR 1050	Grey	EAN 8024530016180
----------	---------	------	-------------------